



# 212

COUNTERLOCK  
FOR FIRE DOORS / PANIC EXIT DOORS

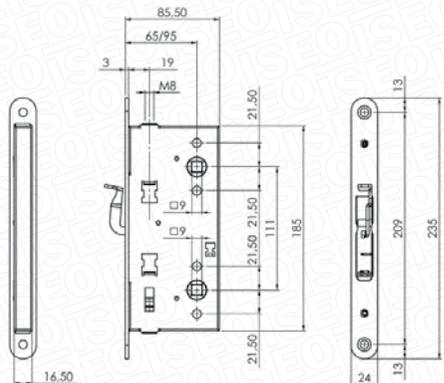

INVERTIBLE VERSION

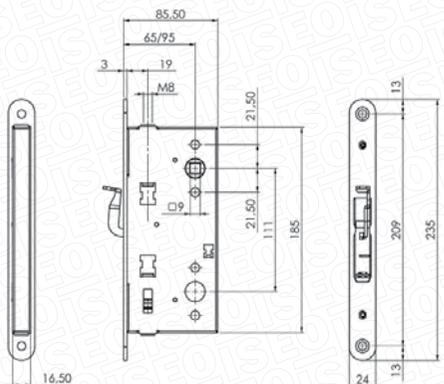

NON-INVERTIBLE VERSION

## PRODUCT:

The 212 panic exit door counterlock with manual lever is intended for use as the lock for the secondary leaf of a double leaf fire door and panic exit door.

## OPERATING:

### Panic exit and Flush Bolt function

The counterlock receives and contains the latch of the primary panic exit lock (version with latch only).

The panic exit bar retracts the bars and releases the latch of the primary panic exit lock.

The lever on the faceplate retracts the bars.

The bars are retained by bar lock at the top.

The system locks automatically - the bar lock releases the bars when the secondary door leaf is pushed closed.

## RANGE:

- Reversible, invertible panic exit counterlock (with double square handle spindle).
- Reversible, non-invertible panic exit counterlock (with single square handle spindle).

## STANDARDS:

CE marking for use on fire resistant doors, in accordance with the EN12209:2005 standard, and for use on doors installed along escape routes (fire resistant and other) in accordance with the EN1125 and EN179 standards.

## TEXT FOR SPECIFICATIONS:

Panic exit counterlock and Flush Bolt for the secondary door leaf of a double leaf fire door. Manual lever incorporated in faceplate. Bar distance from faceplate spacer 19 mm, bar travel 17 mm. For doors installed along escape routes, in accordance with the EN179:2008 standard, use 0324\* and 0325\* series fire resistant handles. For doors installed along escape routes, in accordance with the EN1125:2008 standard, use Palmo, Palmo Push, Idea Base and Push Infilare certified panic exit bars.

## MATCHING ACCESSORIES:

- 214 locks for fire doors and panic exit doors (latch only version).
- 0324\* and 0325\* series fire resistant handles.
- Push Pad devices.
- PALMO and PUSH PALMO panic exit bars.
- IDEA BASE and PUSH INFILARE panic exit bars.
- Bar lock and relative spacers.
- Bars and ferrules.
- Upper or floor strike plates.

# ISEO®

## TECHNICAL FEATURES

Bar travel 17 mm

Bar distance from faceplate spacer 19 mm

M8 bar mounting

## HIGHLIGHTS

- Invertible panic exit counterlock with selectable bottom bar lift. The bottom bar lift function makes it possible to close the door leaf even with floor-level obstacles such as small stones or other debris.
- Flat faceplate, rounded edges, 235 x 24 x 3 mm
- Lock dimensions 185 x 85.5 x 16.5 mm with a fastener screw spacing of 209 mm, to permit a recess in the secondary door leaf of the same size as the recess in the primary leaf, in accordance with the most widely adopted industry standard.
- Works with panic push-bars (EN1125 compliant doors), emergency handles (EN179 compliant doors) or with the manual lever incorporated in the door.

www.iseo.com