


Performance criteria

Closing force	size according to EN standards	2/3/4
Door width	≤ 1100 mm	■
Dimensions	Length in mm	214
	Depth in mm	41
	Height in mm	56
Mounting plate		□
Hinge / hinge-opposite side		■
DIN L / R		■
Latching speed (adjustable at the side)		■
Closing speed (adjustable at the side)		■
Tested to EN standards		<b>EN 1154</b>
Suitable for fire and smoke control doors		<b>F</b>
Certified according to EU regulations		<b>CE</b>

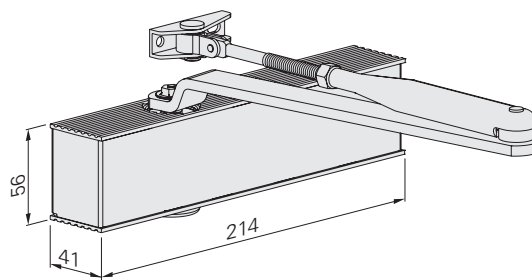

Dimensions: ECO TS-14 EN

- Yes
  - No
  - Optional
- Wooden door

Steel door

Profile door

ECO Newton TS-14 EN ■ Highlights at a glance




Details for ECO Newton highlights can be found at the beginning of this section.



Body + ECOcllic: Silver RAL 9006      Body + ECOcllic: White RAL 9016      Body + ECOcllic: Black RAL 9005

! Different closing forces can be set by movement on the door leaf.

Standard arms and levers are always delivered in the same colour as the body.

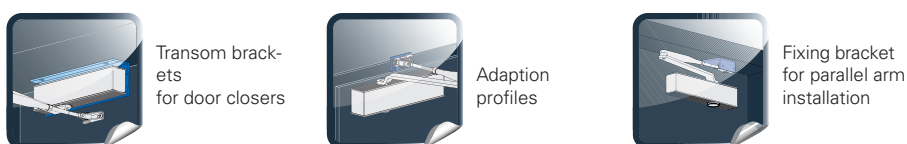

# Order information


## ECO **Newton** TS-14 EN ■ Standard arm closers

### Product information

- Closing force 2 / 3 / 4 (with mounting plate 3/4) according to EN standards (for door widths up to 1100 mm)  
Adjustable by moving the door closer
- Latching speed and closing speed continuously adjustable at the side
- Same model for DIN L / R
- Depth only 41 mm
- Max. door opening angle: 180°
- Pull side installation – standard installation (mounted on door leaf)
- Push side installation – overhead installation (mounted on transom)

### Article numbers

#### ECO **TS-14 EN (2/3/4)**



Door closer with standard arm	Colour		Art. no.	Mounting plate for TS-14 EN	Colour		Art. no.
ECO TS-14 EN (2/3/4)	Silver	RAL 9006	5030039305	MPL-14 EN (3/4)	Silver	RAL 9006	5030040766
ECO TS-14 EN (2/3/4)	White	RAL 9016	5030039306	MPL-14 EN (3/4)	White	RAL 9016	5030044130
ECO TS-14 EN (2/3/4)	Black	RAL 9005	5030039307	MPL-14 EN (3/4)	Black	RAL 9005	5030040769